

1

2


3

4

5

6

Projection




A

B

C

D

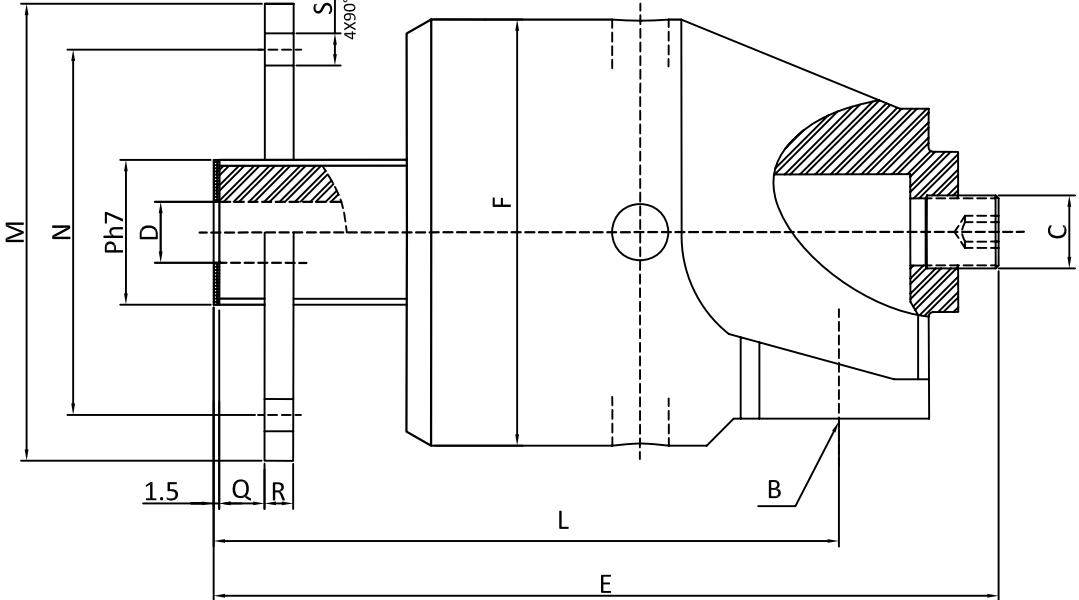

OUTLINE DIMESION												(UNIT) mm	
TYPE	B	C	DØ	E	FØ	L	MØ	NØ	Ph7	Q	R		
QDF-G3/8	G3/8	G1/4	9	109	43	82	53	38	18	6	8		
QDF-G1/2	G1/2	G3/8	13	125	55	92	60	45	25	6	10		
QDF-G3/4	G3/4	G1/2	18	137	64	101	68	50	30	6	10		
QDF-G1	G1	G3/4	23	164	70	119	78	60	36	7	10		
QDF-G1 ^{1/4}	G1 ^{1/4}	G1 ^{1/4}	31	182	85	133	94	70	44	8	12		
QDF-G1 ^{1/2}	G1 ^{1/2}	G1 ^{1/2}	G1 ^{1/4}	203	92	139	99	78	52	10	14		
QDF-G2	G2	G2	G1 ^{1/4}	224	110	154	119	95	65	10	14		

Working parameters:
Max.Speed: 6000RPM
Max.pressure: 7500PSI
Temperature Range: 5°Cto128°C
Medium type :water gas oil and so on
Materials :Stainless steel
Passage:1 Passage

1							Drawing	Design	Audit	Approval		seals	Dynamic seal			
2													material	Stainless steel	name	rotay joint
3				Size range	Allow poor			Date of publication					bearing	High speed ball bearing	number	NO.ONE
4	Change content		Date				HIDNEY ELECTRONICS						weight		Model	

1

2

3

4

5

6